

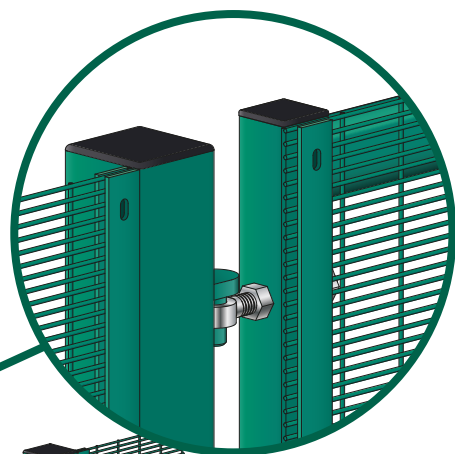


Protek Elite 358 Bespoke Gates

High Security Gates

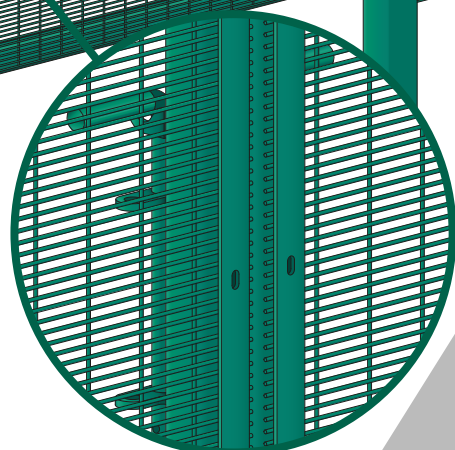

Hinge Detail

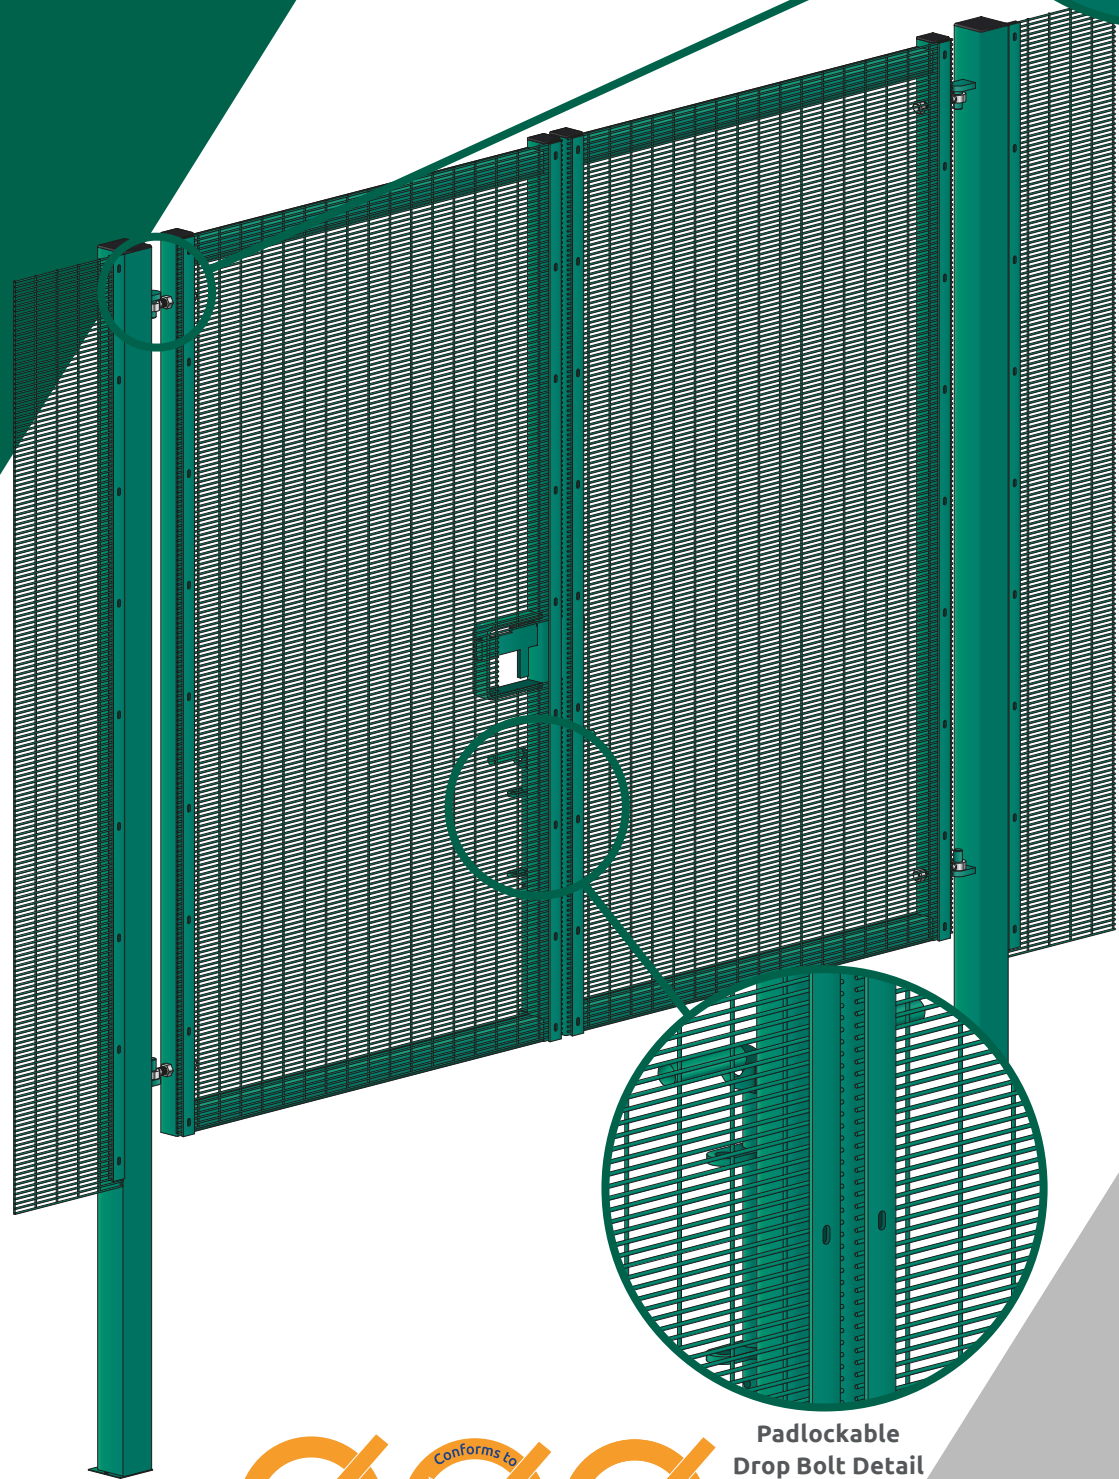

Padlockable Drop Bolt Detail



For more details on this product please visit our website:
www.alexandrasecurity.com/high-security-gates

Protek Elite 358 Bespoke Gates

Double Leaf and Single Leaf – Self-colour, hot dip galv

For a complete SR1 accredited installation, Alexandra is able to offer matching gates made to the same high specifications. Mesh is secured to framework with clamp bars.



For details on how gate construction can be changed to suit a particular requirement please refer to pages 98-101 for a list of possible options.

Product and Finish Standards

- Mesh panel wire manufactured to BS 4102 and galvanised to BS EN 10244-2:2001 class D, weld strength is 75% of the minimum tensile strength of the wire (tensile range 540-690 N/m²)
- Post material manufactured to BS EN 10210-2:1997 and galvanised to BS EN 10346:2009
- Panels & Posts are powder coated to BS EN 13438:2005 (min 100 micron)
- All welding carried out in accordance with BS EN 1011-1 and BS EN 1011-2 by suitable personnel qualified according to BS EN 287-1

Options

- See the Gates Technical section on pages 96-97
- See the range of Gate Accessories on pages 98-101

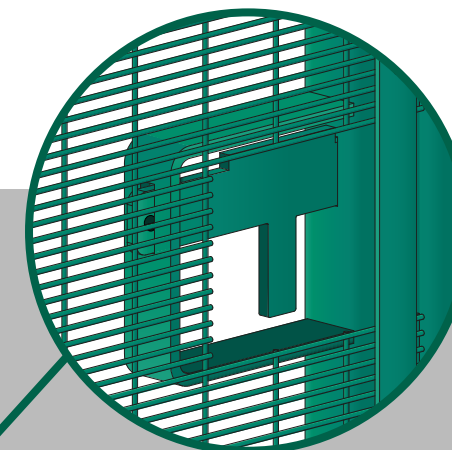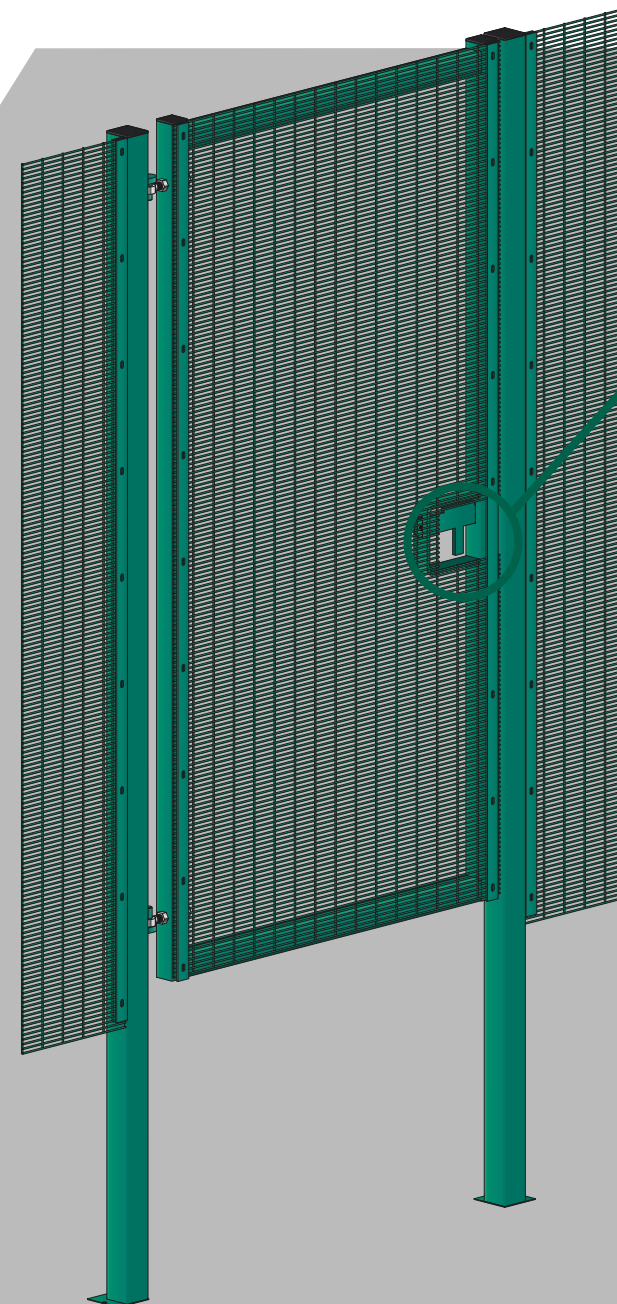

Padlockable Slide Bolt Detail

Suitable For:

see Protek Elite 358 panel on pages 60-61



Protek Elite 358
 Bespoke Gates