




Protek[®] 656 / 868 Gate

Twin-Wire Mesh Security Gates

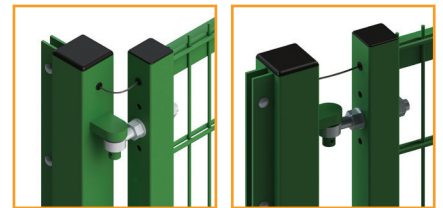



The Protek 656 or 868 twin-wire mesh fence system features a deeper mesh construction that provides the fence line with increased strength and rigidity.

Manufactured to a high-standard, twin-wire entrance gates feature double 6mm or 8mm diameter horizontal wires, between a 5mm or 6mm vertical wire to create a mesh that is extremely difficult to cut through.

The matching gates for this system are supplied powder coated over a galvanised finish for long-lasting weather protection. Our standard colour is green (see options), but other RAL colours can be supplied on a short lead time.

Protek 656 / 868 Gate Features

- 1 Padlockable Slidebolt
- 2 Adjustable Hinges & Gate Restrainer
- 3 Padlockable Dropbolts
- 4 Raging plates to key into concrete

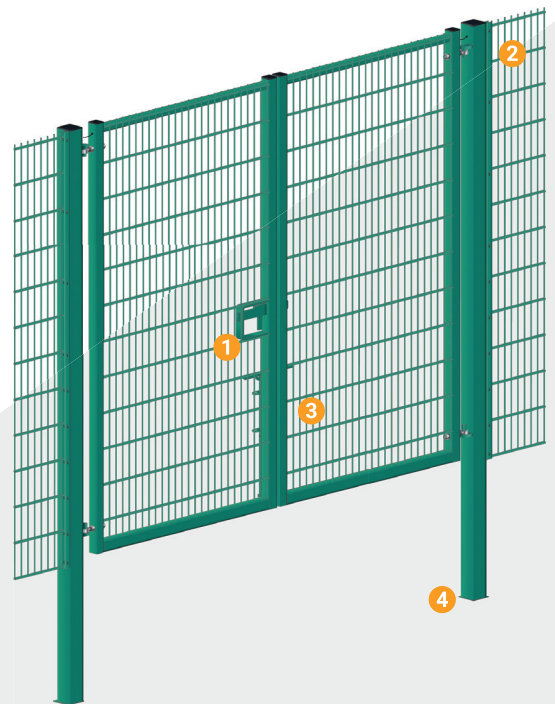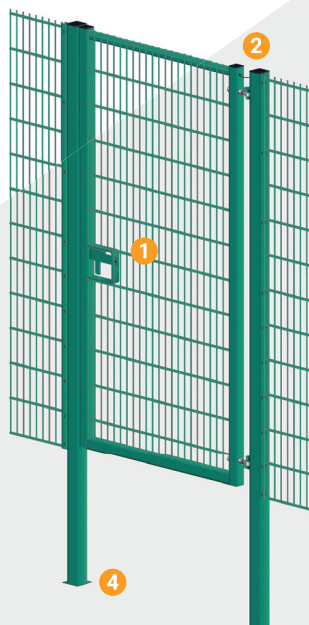

Other RAL colours available as special order



Protek® 656 / 868 Gate


DATASHEET

Version 1.2 | 07-24



Slide Latch With No Protruding Handle

Our slide latches are padlockable and are designed and manufactured not to have any edges that protrude outside of the gate face. This is especially important when gates are used in the education sector.



Gate Restrainers Fitted As Standard

All Protek gates also come with gate restrainers, a simple but essential safety device to prevent the gate failing should the top or bottom hinge fail. These very strong restrainers are capable of holding gate leaves on all sizes in the Protek range.



In-Board Dropbolts With No Protruding Edges

Both our single and double-leaf gates feature in-board dropbolts that can be padlocked. The in-board design keeps the bolt flush against the gate face when in the open or locked position.

Options

- Various lock options available including, Key Lock, Digital Lock, Maglock and Panic Latch
- Self-Close Hinges
- Locking Dropbolts
- Standard colour: RAL 6005 (Moss Green). Other colours available on request

Applications

- Schools
- Sports Facilities
- Retail Parks
- Business Parks

Alexandra Security, Perimeter Works, Whetsted Road,
Five Oak Green, Tonbridge, Kent. TN12 6PZ

www.alexandrsecurity.com | 01892 833 001

Protek is a registered trademark of Alexandra Security Ltd

While care has been taken to ensure that all information provided on this data sheet is accurate, Alexandra Security reserves the right to change product specifications at any time. E&OE.

Product Technical Information

- Mesh panel wire manufactured to BS 4102 and galvanised to BS EN 10244-2:2001 class D, weld strength is 75% of the minimum tensile strength of the wire (tensile range 540-690 N/m²)
- Post material manufactured to BS EN 10210-2:1997 and galvanised to BS EN 10346:2009
- Panels & Posts are powder coated to BS EN 13438:2005 (min 100 micron)
- All welding carried out in accordance with BS EN 1011-1 and BS EN 1011-2 by suitable personnel qualified according to BS EN 287-1

15 Year Product Guarantee

We work hard to ensure that when you choose Alexandra, there are no shocks or surprises, and that the finished item we deliver looks and functions every bit as well as the initial concept. But should the worst happen we can guarantee that we will not stop until everything has been resolved, and are proud to say that we have a 100% satisfaction rating on all post sale issues. In addition, we are able to offer a 15-year guarantee, covering the performance and appearance of our mesh fencing systems. Giving you added confidence when specifying an Alexandra product.

For more information on our product guarantee, please see our website - www.alexandrsecurity.com.



Data subject to change